

Ductware

PROGUARD

by Ductmate



Dual and Single Film Polyethylene With a High-Tack Adhesive

Introducing the newest solution from Ductmate

- Dual Film Polyethylene
- Elongation: 600%
- Available in Dual Film, Blue and Single Clear Film
- Available in 2.0 & 2.5 mil thickness
- Leaves no sticky residue on ductwork after removal

Ductware[®]
Productivity solutions with green results

PROGUARD

Dual Film Polyethylene With A High-Tack Adhesive

DESCRIPTION

PROguard is a dual film polyethylene with a high-tack adhesive specially formulated to keep the film attached, leaving no residue when removed. Its unique manufacturing process gives PROguard unmatched puncture resistance, strength, elongation, and workability.

BASIC USE

PROguard is designed to be placed over the opening of the ductwork during storage and transportation, to protect the inside of ductwork from dust, dirt, and other particles that can lead to poor indoor air quality.

SPECIAL CHARACTERISTICS


- Dual Film Polyethylene
- Elongation: 600%
- 2.5 mil Dual Film Polyethylene acts like a 4 to 4.5 mil single film
- 2.0 mil Dual Film Polyethylene acts like a 3.5 - 4 mil single film
- Does not leave sticky residue on ductwork after removal

PACKAGING INFORMATION

Item #	Description	Dimension	Packaging
DW-PG24	ProGuard Dual Film 2.5mm (Clear)	610mm x 61M	2 rolls/box
DW-PG24B	ProGuard Single Film (Blue)	610mm x 61M	2 rolls/box
DW-PG24C	ProGuard Single Film (Clear)	610mm x 61M	2 rolls/box
DW-PG36	ProGuard Dual Film 2.5mm (Clear)	914mm x 61M	1 roll/box
DW-PG36B	ProGuard Single Film (Blue)	914mm x 61M	1 roll/box
DW-PG36C	ProGuard Single Film (Clear)	914mm x 61M	1 roll/box
DW-PG48	ProGuard Dual Film 2.5mm (Clear)	1219mm x 61M	1 roll/box
DW-PG48B	ProGuard Single Film (Blue)	1219mm x 61M	1 roll/box
DW-PG48C	ProGuard Single Film (Clear)	1219mm x 61M	1 roll/box

DIRECTIONS FOR USE

Before applying PROguard, the duct surface should be clean, dry, and free of any dirt, oil, grease, water, or foreign matter.

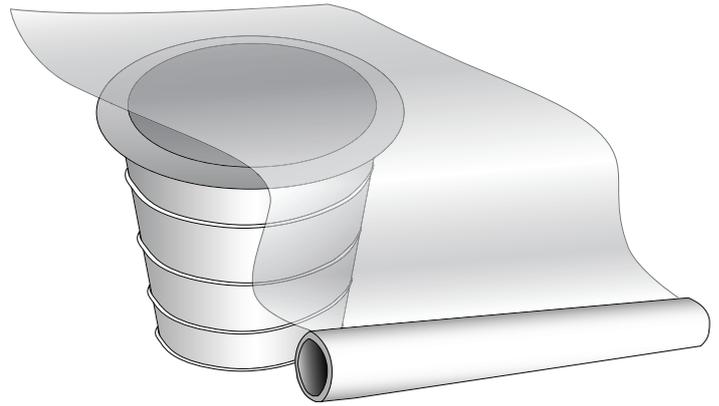

TECHNICAL INFORMATION

COLOR:	Clear and Blue
ADHESION:	Adheres to Galvanized, Stainless Steel, Galvannealed, Aluminum, PVC Coated, Aluminized, and Black Iron.
TYPE:	Polyethylene
SHELF LIFE:	For best results use within 1 year after purchase
ELONGATION:	600%
INDOOR/OUTDOOR:	Stands up to the rain, snow, or sun
UV RESISTANCE:	Good
TENSILE STRENGTH:	2.5 mil ProGuard: 13.1 lbs/in 2.0 mil ProGuard: 9.0 lbs/in
ADHESIVE:	Does not leave sticky residue on ductwork after removal
VOC CONTENT:	None

LIMITED PRODUCT WARRANTY

Ductmate Industries, Inc. is not liable for consequential, incidental or special damages. There are no statutory or implied warranties including the warranties for fitness for a particular purpose and merchantability. There are no warranties other than as set forth below and Ductmate Industries, Inc. neither assumes nor authorizes any person to assume any liability or other obligation in connection with PROguard.

PROguard is warranted to be free from any and all defects in material and workmanship only at the time of shipment from our plant. If material is shown to be defective at the time of shipment from our plant, Ductmate Industries, Inc. will replace or issue credit for the original purchase price. To determine the suitability of PROguard for each specific purpose the user must conduct his own test. Manufacturer does not guarantee the results from the use of PROguard because of the many possible variances in surface quality, structural movement, or externally caused damages.