

Ductware

PROrail™ & Acoustical Turning Vane

by Ductmate

2" & 4" Turning Vane & Rail



PROrail: Every decision should be this successful... and this easy!

- Available for 2" and 4" Turning Vanes
- Available in specialty metals
- Ensures precise vane alignment
- Assembly is quick and easy
- Fabricated with precision equipment
- Consistent product quality
- Acoustical vane designed for projects that demand quieter operating systems
- Perforated facing filled with insulation to reduce and absorb noise

Ductware®
Productivity solutions with green results

DESCRIPTION

2" and 4" Turning Vane Rail

BASIC USE

Provides a self-aligning, easy means of securing turning vanes for the purpose of directing air around mitered elbows.

SPECIAL CHARACTERISTICS

Precision stamped from hot-dipped galvanized steel.

Available from stock through a nationwide distributor network.

Pressure tested to 3750 Pa with no separation

Trained Ductware personnel are available to assist with additional technical questions

Exclusive patented features ensure that the rail will remain intact, and your airflow efficient, even under pressure

PRODUCT GUARANTEE

PROrail is guaranteed against defective material

PACKAGING INFORMATION

| Part# Per | Size | Gauge | Ctn PROrail™ |
|------------|------|-------|--------------|
| DW-2PRGA22 | 2" | 22 | 30.5mtrs |
| DW-2PRGA24 | 2" | 24 | 30.5mtrs |
| DW-4PRGA22 | 4" | 22 | 30.5mtrs |
| DW-4PRGA24 | 4" | 24 | 30.5mtrs |

TURNING VANE

| | | | |
|------------|----|----|----------|
| DW-2VGA26 | 2" | 26 | 30.5mtrs |
| DW-4VGA24 | 4" | 24 | 30.5mtrs |
| DW-4AVGA24 | 4" | 24 | 30.5mtrs |


Acoustical Turning Vane

INSTALLATION INSTRUCTION

1. Cut PROrail to length.




2. Cut the vanes to length.

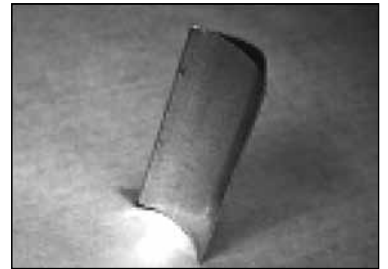

3. Set the vanes onto the bottom rail.



4. Insert the top rail tabs into the vanes.

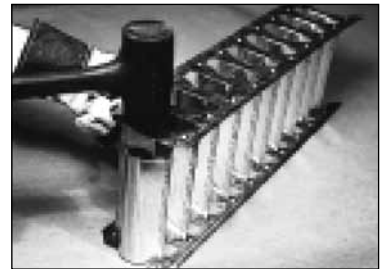

Assembly is ready to be inserted into the duct.
Fasten to duct wall per the SMACNA recommendations.