


Ductware

WDCI '23MM' FLANGE. (SMACNA CLASS H)

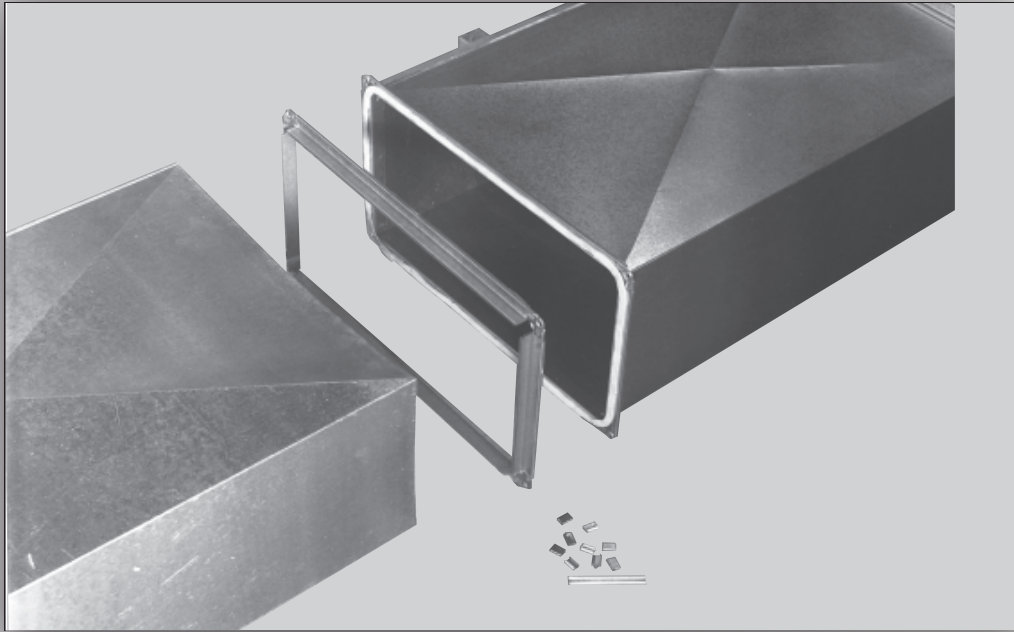

Rectangular Duct Connection System

Strong and Virtually Leak-Free

- Simple to install
- No additional sealing required
- Available in specialty metals
- Consistent connections

Ductware[®]
Productivity solutions with green results

WDCI J AND H

Rectangular Duct Connection System

DESCRIPTION

WDCI H connection system consists of roll-formed flange, corner pieces, gasket, bolts, nuts and cleat. The flange attach to the duct wall and has an integral mastic which allows the flange to seal itself to the duct. Corner pieces are used to add rigidity to the flange; hold the ductwork together and provide a sealing surface for the gasket. The gasket serves as a seal between the flanges. The cleat insures even compression of the gasket along the length of the flange.

BASIC USE

WDCI H connection system is used to connect rectangular ducts when a rigid, leak-free connection is required.

SPECIAL CHARACTERISTICS

Sealing materials meet NFPA 90A & 90B Class 1 requirements. WDCI H connection system is not recommended for applications with duct gauges heavier than 20 GA or lighter than 26 GA.

TECHNICAL INFORMATION

WDCI H connection system has been tested in accordance with SMACNA procedures with test results certified by Pittsburgh Testing Laboratory, Pittsburgh, PA. No external sealant was employed and the certified test results reveal: WDCI J connection system is comparable to the SMACNA Class "J" transverse joint and WDCI H connection system is comparable to the SMACNA Class "H" joint. Aluminum WDCI J is comparable to a SMACNA H connection. WDCI H is not available in aluminum or stainless.

CLEAT

PVC CLEAT:
Polyvinyl chloride (PVC) is an organic polymer derived from petroleum and salt.

PERFORMANCE PROPERTIES:
Relative high ignition resistance flash ignition 391°C/735°F
self ignition 454°C/850°F

Low fuel contribution
Lack of flaming drips
High external heat necessary to maintain combustion
UL723 (ASTM E-84) Test Data: Flame Spread:10
Fuel Contribution: 0
Smoke Density: 10
Service Temp: +32°F to +150°F

PVC Cleat is used around perimeter of transverse joint. Not recommended for roof top applications.

METAL CLEAT:
WDCI Metal Cleat is roll-formed of 22 GA galvanized steel for application around perimeter of transverse joint.

PRODUCT GUARANTEE


All component parts of the WDCI Connection Systems are guaranteed against defective material.

PACKAGING INFORMATION

- WDCI connection systems consist of the following components:
- a. WDCI H flange is roll-formed from 22 GA galvanized steel, with an integral sealant.
 - b. WDCI H bolt corner pieces insert into the hollow web of the WDCI H Angle.
 - c. WDCI metal cleat is roll-formed from 22 GA galvanized steel. (PVC Cleat is available upon request).
 - d. Gasket is extruded butyl for use between mating flanges. (Neoprene gasket is available upon request.)

INSTALLATION INSTRUCTIONS

CUTTING WDCI ANGLE

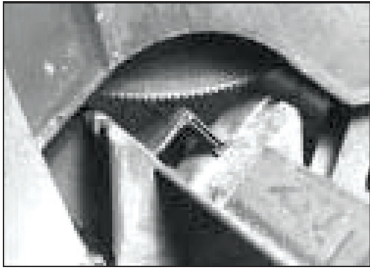

1. Always cut WDCI angle 35-40mm shorter than duct dimension. Slam the blade through the Angle as quickly as possible. Saw must have sufficient horsepower. Always use a metal friction saw blade. A band saw or hack saw can be substituted.




2. Never cut WDCI angle with legs up as chips may fall into the mastic.


Never use an abrasive blade to cut WDCI angle as the heat can melt out the mastic




ASSEMBLING WDCI FRAME

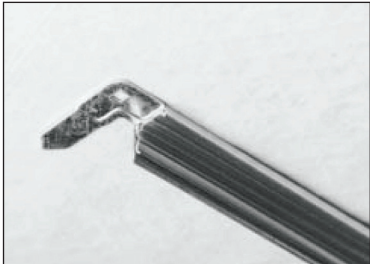

3. Insert a WDCI corner piece into each end of the two shortest frame angle pieces.

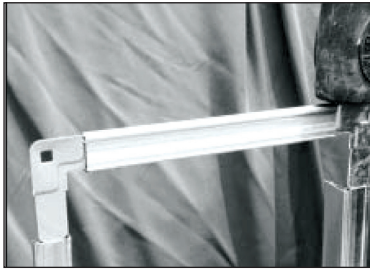


4. Slide two longer angle pieces onto corner pieces already inserted into shorter pieces, then add the second short piece to complete the frame.

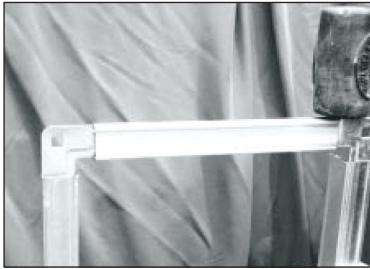

5. Now complete the frame by seating the corner pieces into the WDCI angle.



6. Start, completed WDCI frame at corner of duct.

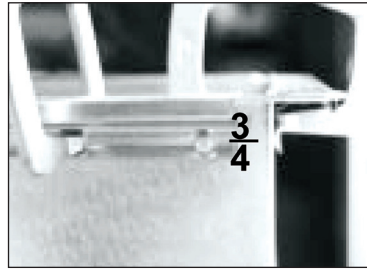

10. It is essential that the frame angle is fastened to the duct within 3/4" of the end of the angle at each corner. When the table below requires a second screw at each corner it must be placed within 2"-3" of the end of the WDCI angle.

WDCI angle may be fastened to the duct with self drilling screws or spotwelds. Spot welding is recommended, especially on ductwork where the static pressure is above 3" and the leakage is specified to be less than 1%.


Due to their superior strength, spotwelds may be substituted for screws in the table below. Table also shows minimum fastening requirements. Job conditions (handling, etc.) may require additional fastening.

Fasten at intervals as in table below:


SCREW SPACING SCHEDULE

DUCT WALL SIZE	0-1000 Pa	1500Pa
610mm	1 screw each corner	1 screw each corner
635-1220mm	1 screw each corner plus 1 @ centre	1 screw each corner plus 1 @ centre
1245mm and over	1 screw each corner plus 1 screw each 610mm	1 screw each corner plus 1 screw each 610mm

SEATING WDCI FRAME

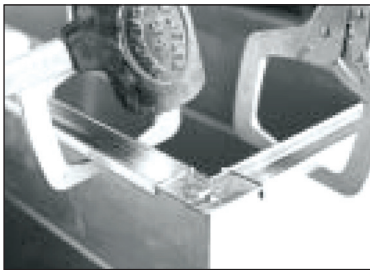

7. Use a mallet to seat the frame onto the duct. *Establish metal to metal contact along length of the angle.*

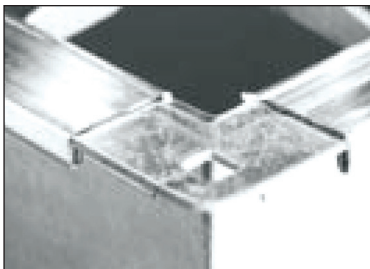


8. The duct must be seated all the way into the WDCI angle in order to penetrate the integral mastic sealant and avoid leakage.



9. Work in one direction around duct when seating the frame. Fasten in sequence as you go. Do not fasten angle at corners first, it can cause seating problems.


APPLYING DUCTMATE 440 GASKET TAPE

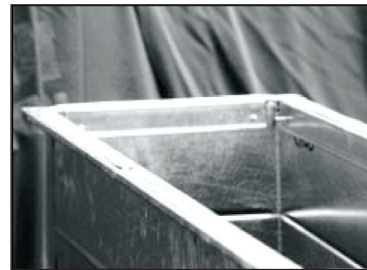

11. Start approximately in the middle of one side, place a single strip of gasket tape completely around the inside edge of the angle frame. At the corners, the gasket must cover the exposed edge of the duct section and the gap between the duct wall and the WDCI corners.




12. Position 440 Gasket in an arc so that it covers the three points in the duct corner. Gasket must cover all three points. Some gasket will protrude into the airstream. Press gasket firmly into contact with the raw edge of the duct corner and WDCI corner assembly. In steps 11, 12, 13, and 14 Ductmate 440 is the preferred gasket. Ductmate Neoprene Gasket may be used where a section must be disassembled.

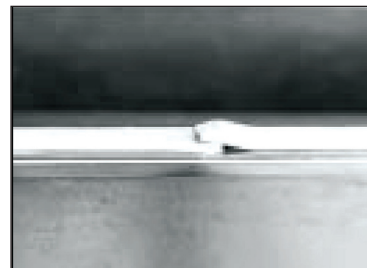

13. Apply 440 gasket completely around WDCI frame to the beginning point. Where gasket meets overlay about 3/8".

DUCTMATE WDCI COMPONENTS

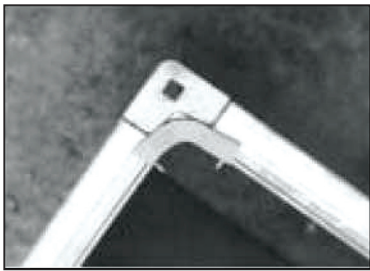


14. On the mating WDCI frame apply 440 gasket only to the corners as in photo (approximately 3" per corner). The same 3 point application requirements apply as in photo 12.



15. Carefully align mating frames before they touch. Ductmate 440 adheres on contact. A drift pin can be used to correct misalignment

WDCI H CORNER PIECE

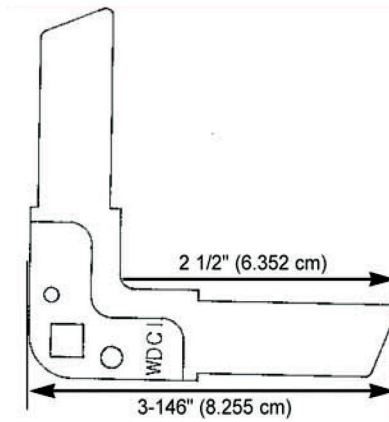


COMPLETING WDCI CONNECTION




16. Insert a 3/8" x 1" nut and bolt for WDCI J Connection Systems.
Insert a 1/4" x 1" nut and bolt for WDCI H Connection Systems.

It is not necessary to over torque the nuts and bolts.

SLIDE-ON BULLNOSING

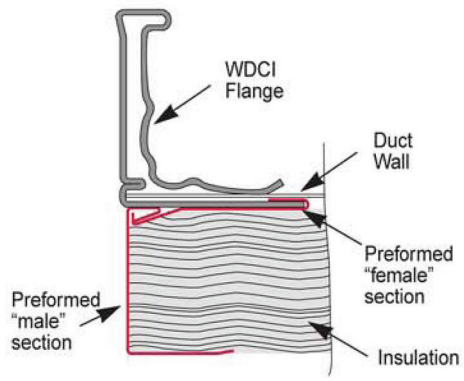

CLEAT INSTALLATION

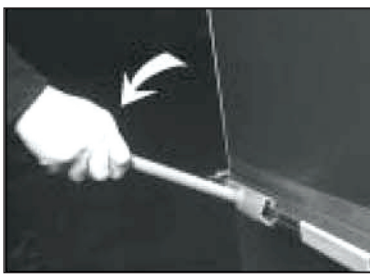


17. WDCI cleat can be snapped-on with the Snapper I Tool or with the Snapper II where space is restricted.

Insert cleat into tool, hook onto mated frames near corner, apply pressure to handle so snapper tool compresses frames and cleat snaps on. Work toward centre of duct using the schedule at left.

For weather-proof duct connection, install a full length, one-piece cleat to top duct flange joint to prevent water from collecting on gasket.

If a corner cannot be bolted due to inaccessibility, cleat can be driven onto the mating flanges to complete the WDCI connection.

WDCI H

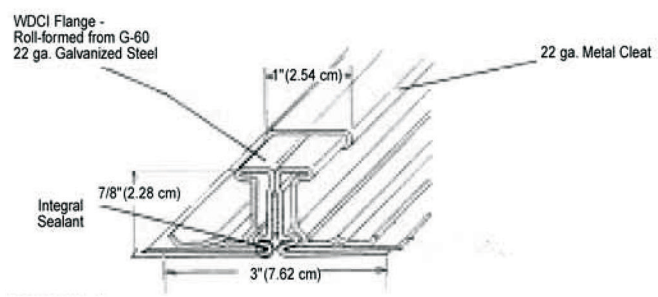

WITH DM440 GASKET
For all low, medium and high pressure application, use 150mm cleat, 610mm O.C.

WITH NEOPRENE GASKET
For 125-500Pa use 150mm cleat, 810mm O.C

For 750-1000Pa use 150mm cleat, 480mm O.C

For 1500-2500Pa use use 150mm cleat, 300mm O.C




SNAPPER I & II
Ideal tool to attach cleat to WDCI flange joint where space is not a consideration. Use Snapper II in conjunction with 5/8" deep-wall socket, extensions and wrench (not included) to attach cleat to hard to reach places.

ADDITIONAL INSTRUCTIONS FOR APPLICATION REQUIRING NEOPRENE GASKET

When using Neoprene gasket with WDCI J & H connection system, sealant is required in the corners. Unlike the Butyl gasket the Neoprene gasket alone is unable to properly seal the corners. It is necessary to apply a small amount of duct sealant (preferably sealant in tube form) in all eight corners to form a flawless connection. Ideally the sealant should be allowed to cure before the gasketing is applied. However, if reasonable care is taken, the gasket may be applied before the sealant is cured. When applying the gasket, care must still be taken at the corners. As with the 440 Butyl gasket, the three points at the corners should be covered. The joint is then completed in the standard manner. This sealing technique is especially useful when making connections at fire dampers where the Neoprene must be used.

Frequently a contractor installing a high velocity duct system will employ a duct joint with which either he or his work force have no experience. In such a case, it is strongly recommended that the contractor promptly test the initial 100 to 300 feet of duct before installing any more duct. This test will quickly reveal whether or not the workmen can make this joint air-tight in an economical manner.

Reprinted from SMACNA High Pressure Manual.

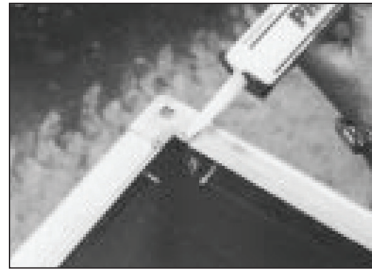

1. Apply a liberal amount of Proseal sealant in each of the eight corners. The sealant must cover the three points in the duct corner.



2. Start applying Ductmate Neoprene gasket about halfway between corners. Position gasket in center of WDCI angle as in photo.



3. Position Neoprene gasket in an arc so that it covers the three points in the duct corner. Gasket must cover all three points.



IMPORTANT: Gasket must cover these 3 points.



4. Apply Neoprene gasket completely around WDCI frame to the beginning point. Butt the two ends of the gasket up against each other. Do not overlap the two ends.